



A division of SPX Corporation
655 Eisenhower Drive
Owatonna, MN 55060-0995 USA
Phone: (507) 455-7000
Tech. Serv.: (800) 533-6127
Fax: (800) 955-8329
Order Entry: (507) 455-1480
Fax: (800) 283-8665
International Sales: (507) 455-7223
Fax: (507) 455-7746

Form No. 106084


**Parts List &
Operating Instructions
for:**

7894



Adapter Set

Application: Dodge / Jeep 4WD Upper and Lower Ball Joints


**No. 313967
Remover Cup**

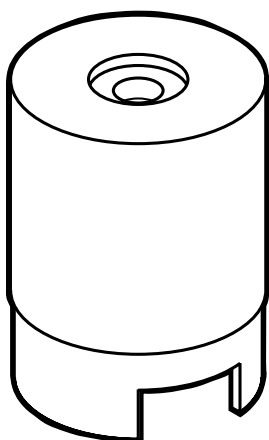

**No. 313969
Installer Cup**

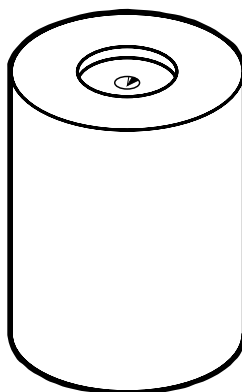

**No. 313968
Remover**




**No. 313970
Installer**

Safety Precautions




Caution: To prevent personal injury:




- Wear protective eyewear that meets ANSI Z87.1 and OSHA standards.
- Before performing any repairs on a vehicle, block all wheels to prevent movement.
- Check the final alignment of tooling and components before using a C-frame press to exert pressure.

Operating Instructions


1. Position the tools as shown to remove or install the upper or lower ball joint. **Note for Installation:** Clean the control arm, and coat the I.D. with a suitable lubricant.
2. Tighten the forcing screw until it meets the cup, and check the alignment of all tooling and components. Continue tightening the forcing screw until the ball joint is removed or installed.

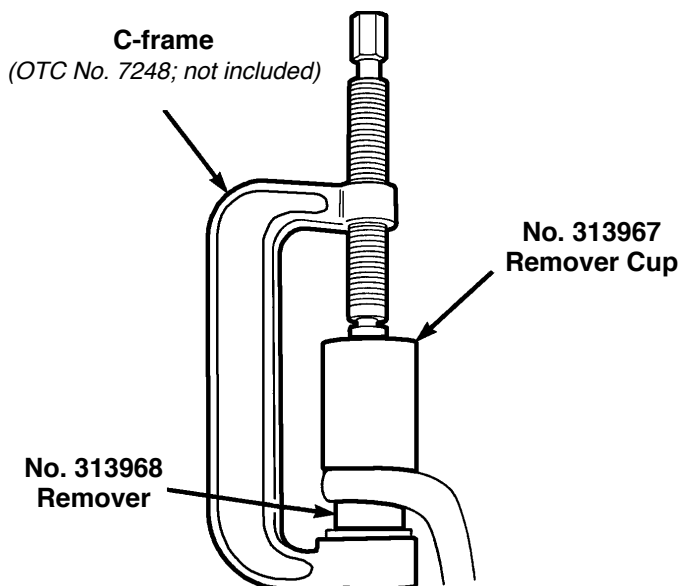


Removing the Upper Ball Joint

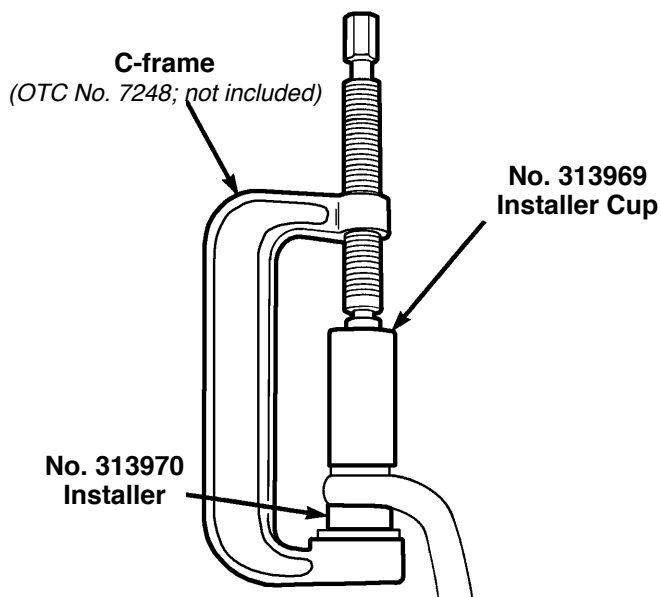

Installing the Upper Ball Joint

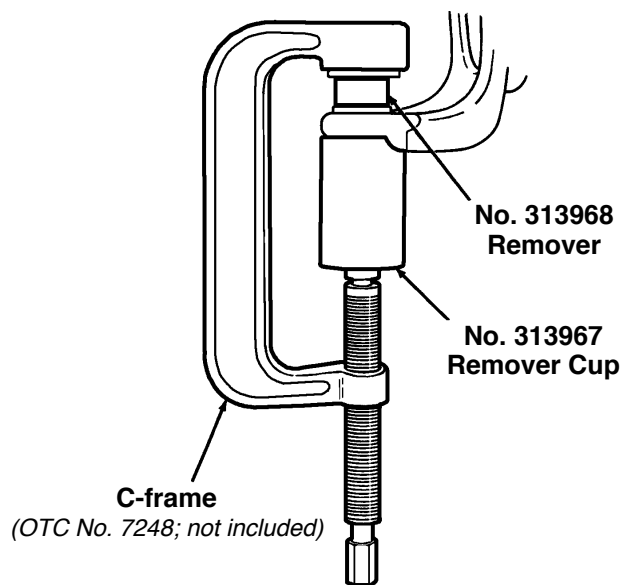

Removing the Lower Ball Joint

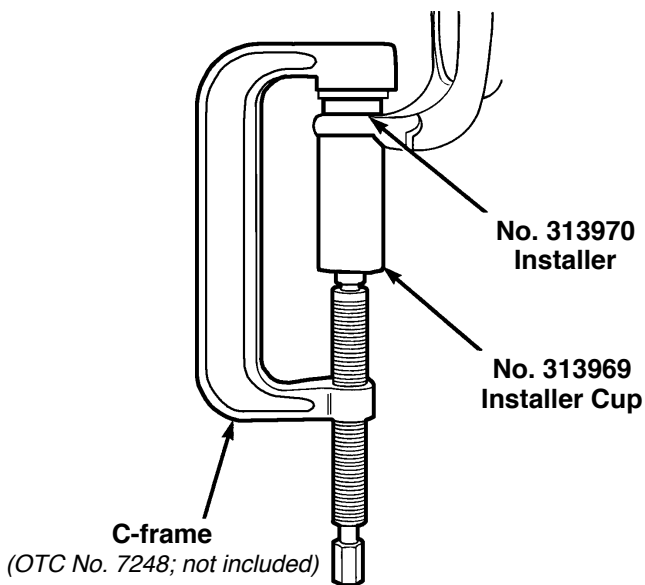

Installing the Lower Ball Joint